

Standard-Duty Applications



**GM31
Tool Positioner**

Tool Positioner 1-12 lbs. (.05-5.4 kg) GM31


Holds an object in desired position within travel range (55") without use of a ratchet or locking device.

Easy downward tool mobility.

Simple upward repositioning of the load, requiring only a force equal to the weight of the suspended object.

Minimizes operator fatigue in high-cycle applications with light loads.

Easy tension adjustment by placing screwdriver or coin into slot of shaft. To increase tension, turn shaft clockwise; to decrease tension, turn counterclockwise.

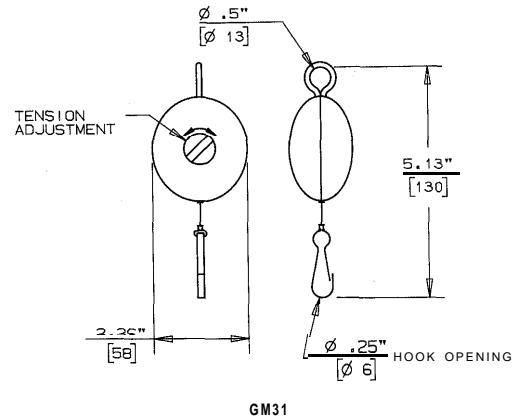

Model No.	Weight		Cable Travel	
	lbs.	kg	ft.	m
GM31	1-12	.05-5.4	4.6	1.4

Standard-Duty Applications

Retractors 1-4 lbs. (0.5-1.8 kg) Series RB

Lasting performance and maximum tool support, with heavy-duty, long-life spring.

Easy tension adjustment with no tools required.


Full range of motion with 360" swivel hanger.

Quick installation.


Long, consistent service life and reduced maintenance expense with durable nylon cable.

Simplified tool attachment/removal with convenient snap-type tool clip.

Smooth, efficient use is facilitated by in-line alignment of hanger and tool hook.

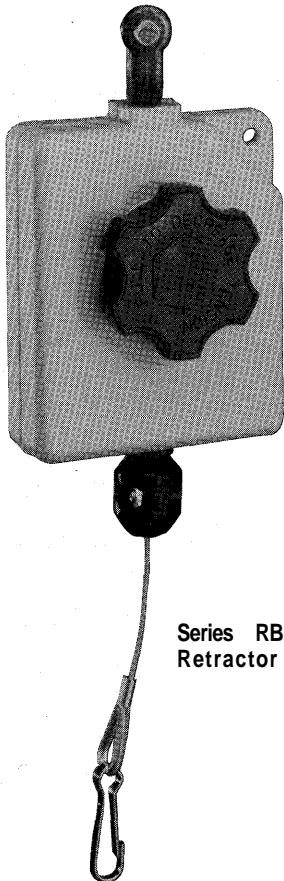

**Series RB
Retractor**

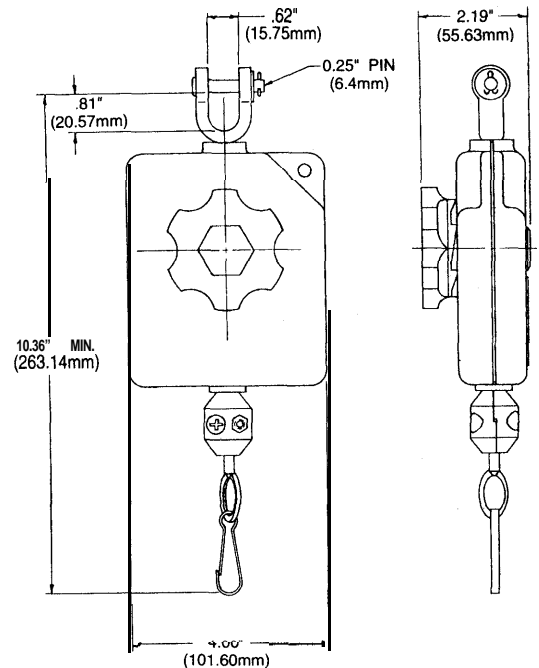

Indoff

sold Nationwide

www.mh-partners.com
www.mhpartners.com

Model No.	Weight		Cable Travel	
	lbs.	kg	ft.	m
RB2	1-2	0.5-0.9	5.2	1.6
RB4	2-4	0.9-1.8	5.2	1.6
RB210	1-2	0.5-0.9	10	2.54